
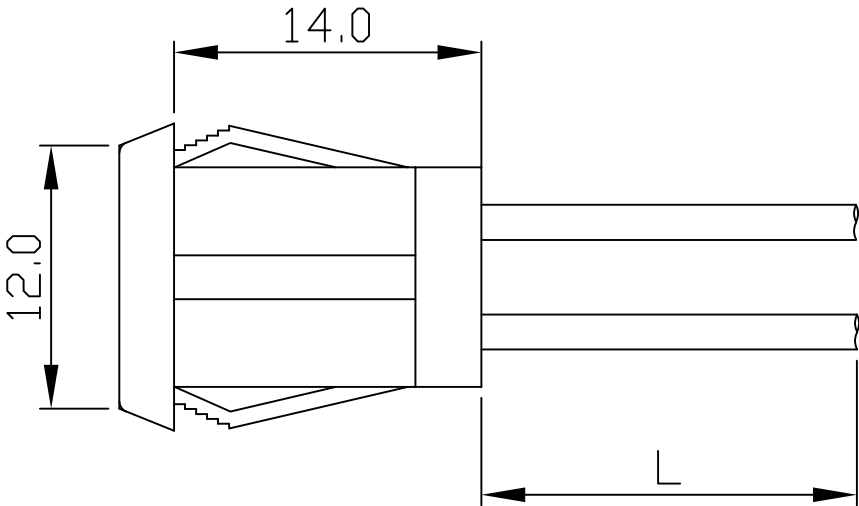
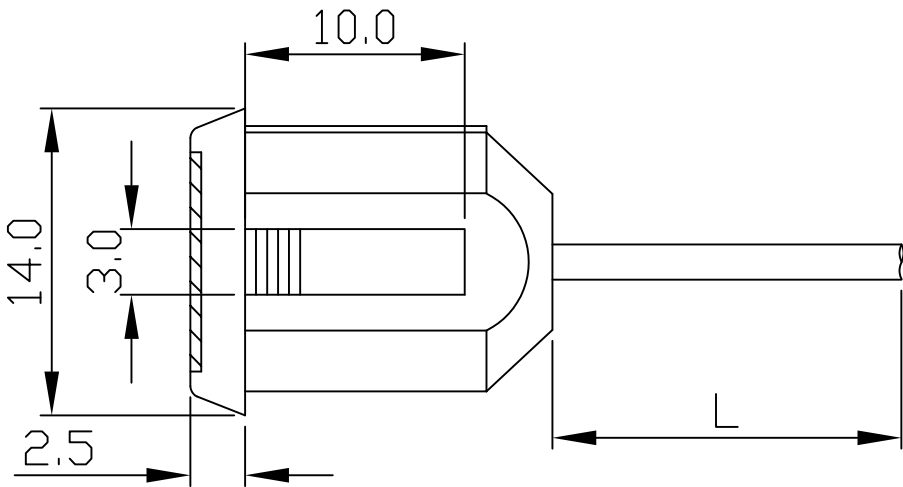


NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS:THISPRODUCTIS BASED ON IPX6

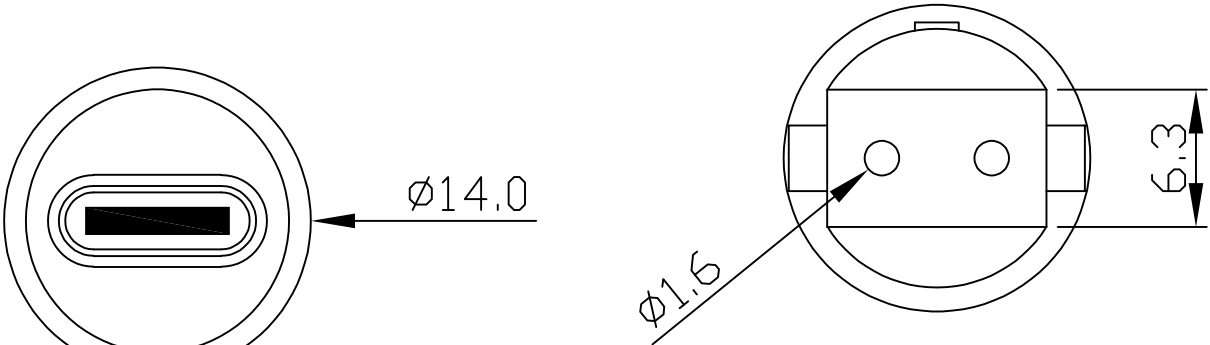

8				TOLERANCE UNLESS SPECIFIED								
7												
6					WITHIN 1.5: ±0.1mm OVER 1.5: ±0.2mm ANGLES: ±2°							
5	WIRE	CUSTOMIZED			ISSUE	DATE	DESCRIPTIONS		APPD.			
4	TERMINAL	BRONZE	16	NI UNDER PLATED OVERALL,GOLD PLATED AT CONTACT AREA,GOLD PLATED AT TERMINATION	TITLE:USB TYPE—C FEMALE		UNIT:mm		DRWG. NO.:			
3	HOUSING	LCP	1	BLACK	MODEL NO: USB—20C—F—022R51K—2P—L		SCALE:4:1		DWN			
2	BODY	PVC	1	BLACK					CHK'D			
1	SHELL	STAINLESS STEEL	1	NI PLATED OVERALL,TAP WITH GOLD PLATED	XIAMEN JINBEILI ELECTRONICS CO.,LTD					APPD.		
NO.	DESCRIPTION	MATERIAL	QTY	PLATING								