

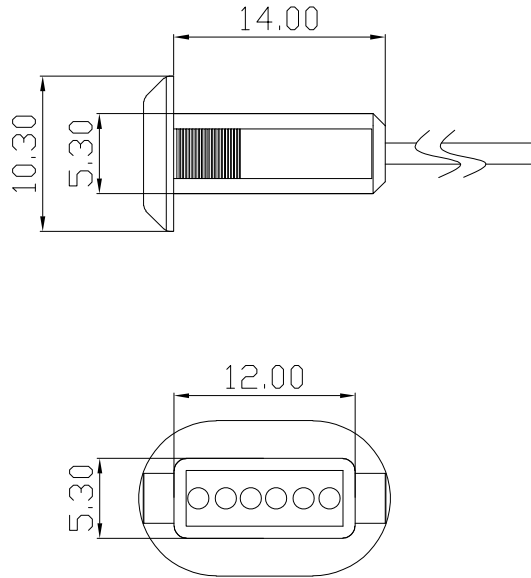
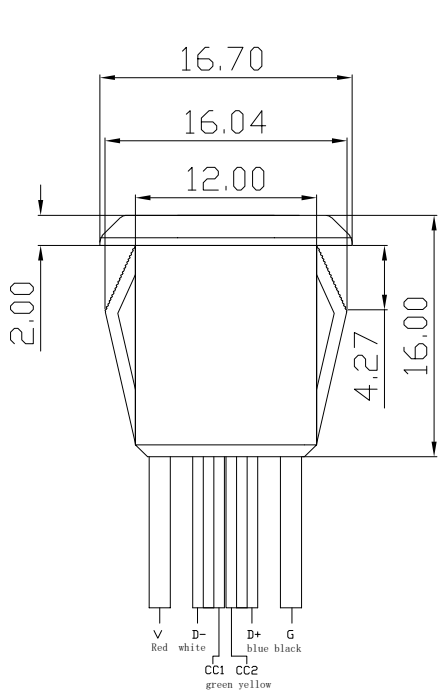


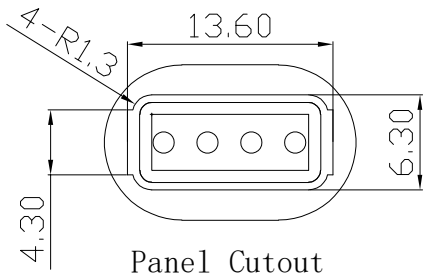


Remark : tined end or connector end options are available

1, 4P data transmission

2, 4P PD fast charging support

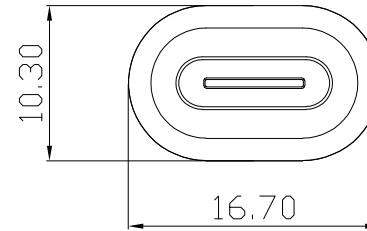

Panel Cutout

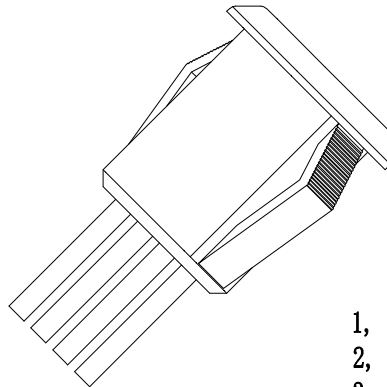

- 1, Hardness : 25
- 2, Wire specs : 1007# 24AWG
- 3, Housing color : White or Black

Specifications :

- 1, Contact resistance :
30M Ω max
- 2, Insulation resistance : 1000M Ω min
- 3, Max Voltage : 100V AC
- 4, Working current : 5A
- 5, Mechanical life : 10000 cycles
- 6, Insertion force : 20N max
- 7, Extraction force : 8N min
- 8, Packaging : bag with SPQ 100pcs
- 9, Working temperature : -55° C to +88° C

8					TOLERANCE UNLESS SPECIFIED						
7											
6					WITHIN 1.5: ±0.1mm OVER 1.5: ±0.2mm ANGLES: ±2°						
5						ISSUE	DATE	DESCRIPTIONS		APPD.	
4					TITLE:USB JACK			UNIT:mm	DRWG. NO.:		
3					MODEL NO: USB-20C-F-06F12L-4P			SCALE:4:1	DWN		
2											
1					XIAMEN JINBEILIELECTRONICS CO.,LTD						
NO.	DESCRIPTION	MATERIAL	QTY	PLATING							